



Einfach. Sicher.



LEISTUNGSERKLÄRUNG

DoP: 0105

für Upat Hülsenanker UHS, UHS-I (Metalldübel zur Verwendung im Beton (hoch belastbar)) – DE

1. Eindeutiger Kenncode des Produkttyps: **DoP: 0105**

2. Verwendungszweck(e):

Nachträgliche Befestigung im gerissenen und ungerissenen Beton, siehe Anhang, insbesondere Anhänge B 1 bis B 6

3. Hersteller: **Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Deutschland**

4. Bevollmächtigter: --

5. System(e) zur Bewertung und Überprüfung der Leistungsbeständigkeit: **1**

6. Europäisches Bewertungsdokument: **EAD 330232-00-0601**

Europäische Technische Bewertung: **ETA-17/0288; 2017-08-22**

Technische Bewertungsstelle: **DIBt**

Notifizierte Stelle(n): **1343 – MPA Darmstadt**

7. Erklärte Leistung(en):

Mechanische Festigkeit und Standsicherheit (BWR 1)

- **Charakteristischer Widerstand für statische und quasi-statische Einwirkungen: Siehe Anhang, insbesondere Anhänge C 1 bis C 4**
- **Charakteristischer Widerstand für die seismische Leistungskategorie C 1 : Siehe Anhang, insbesondere Anhang C 7**
- **Verschiebungen unter Zug- und Querbeanspruchung: Siehe Anhang, insbesondere Anhänge C 7 bis C 8**

Brandschutz (BWR 2)

- **Brandverhalten: Der Dübel erfüllt die Anforderungen der Klasse A 1**
- **Feuerwiderstand: Siehe Anhang, insbesondere Anhänge C 5 bis C 6**

8. Angemessene Technische Dokumentation und/oder Spezifische Technische Dokumentation: ---

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2017-08-29

- Diese Leistungserklärung wurde in verschiedenen Sprachversionen erstellt. Für den Fall unterschiedlicher Auslegung hat immer die englische Version Vorrang.
- Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache. Diese gehen über die (sprachneutral angegebenen) gesetzlichen Anforderungen hinaus.

Specific Part

1 Technical description of the product

The Upat Sleeve Anchor UHS, UHS-I is an anchor made of galvanised steel (sizes with external diameter 10, 12, 15, 18, 24, 28 and 32, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) or stainless steel (sizes with external diameter 10, 12, 15, 18 and 24, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|---|-----------------------|
| Characteristic resistance for static and quasi static | See Annex C 1 to C 4 |
| Characteristic resistance for seismic performance categories C1 | See Annex C 7 |
| Displacements under tension and shear loads | See Annex C 7 and C 8 |


3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|--------------------------|---|
| Reaction to fire | Anchorage satisfy requirements for Class A1 |
| Resistance to fire | See Annex C 5 and C 6 |

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with European Assessment Documents EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

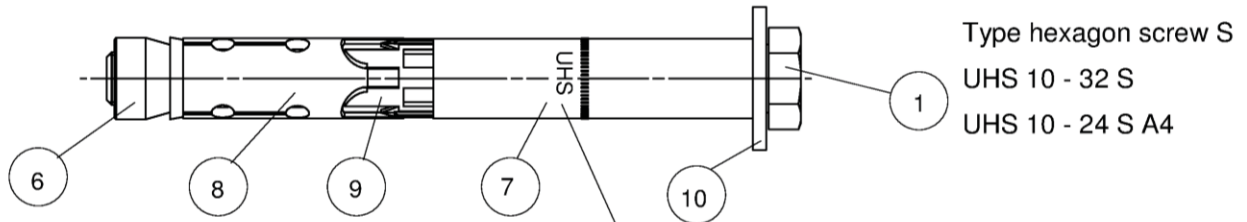


Type hexagon screw **S**
 UHS 10 - 32 S
 UHS 10 - 24 S A4


Marking: Identifying mark of the producer, anchor identity nominal drill hole diameter / max. thickness of fixture e. g. UHS 15/25 A4



Type countersunk screw **SK**
 UHS 10 - 18 SK
 UHS 10 - 18 SK A4




Type hexagon nut **B**
 UHS 10 - 32 B
 UHS 10 - 24 B A4



Type cap nut **H**
 UHS 10 - 24 H
 UHS 10 - 24 H A4

- | | | |
|---------------------|--------------------|-------------------|
| 1 Hexagon screw | 5 Threaded rod | 9 Plastic sleeve |
| 2 Countersunk screw | 6 Cone nut | 10 Washer |
| 3 Cap nut | 7 Distance sleeve | 11 Conical washer |
| 4 Hexagon nut | 8 Expansion sleeve | |

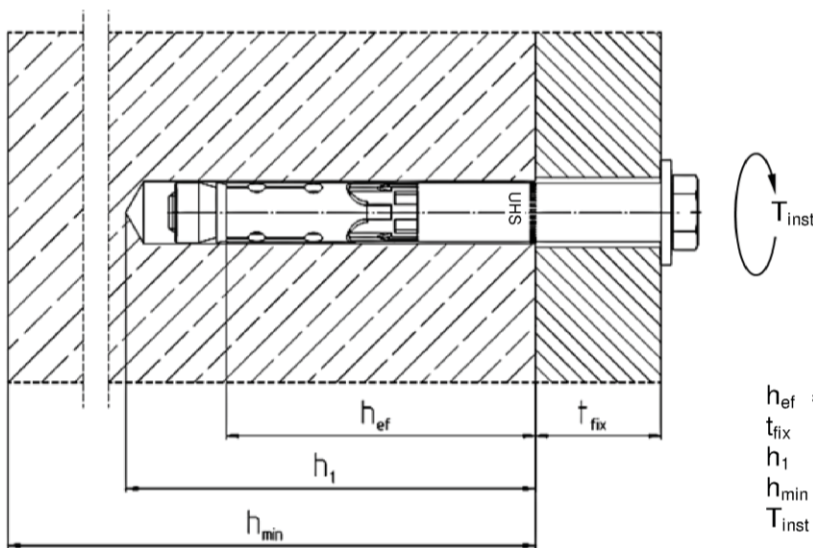


h_{ef} = Effective anchorage depth
 t_{fix} = Thickness of fixture
 h_1 = Drill hole depth
 h_{min} = Minimal member thickness
 T_{inst} = Installation torque

Upat Sleeve Anchor UHS, UHS-I

Product description
 Installed condition and Anchor types UHS, UHS A4


Annex A 1

UHS 12 M6 I (A4)
 UHS 12 M8 I (A4)
 UHS 15 M10 I (A4)
 UHS 15 M12 I (A4)

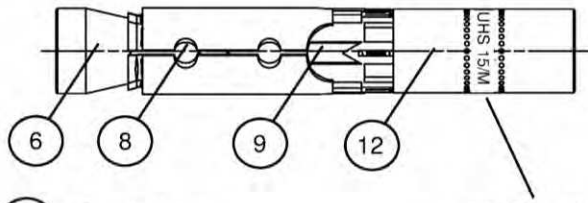


- 6 Cone nut
- 8 Expansion sleeve
- 9 Plastic sleeve
- 12 Internal thread bolt

Marking: Identifying mark of the producer, anchor identity nominal drill hole diameter / size of internal thread e. g. UHS 15/M12 I A4

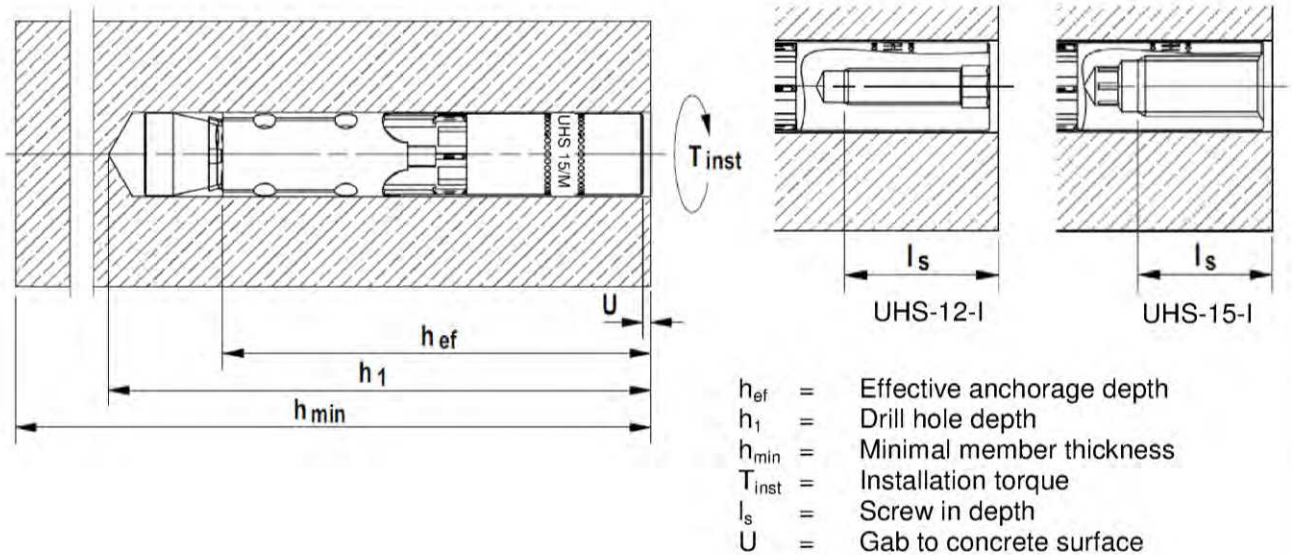

Example of possible Applications UHS-I and UHS-I A4

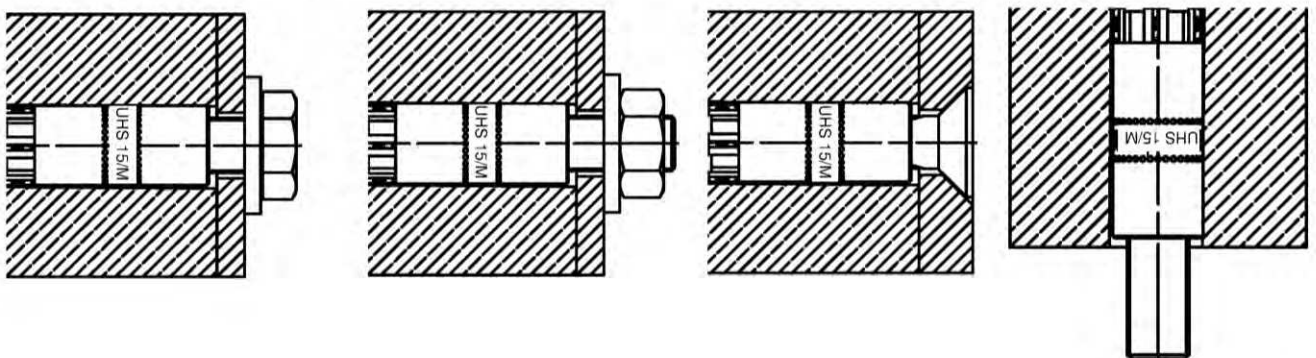

Upat Sleeve Anchor UHS, UHS-I

Product description
 Installed condition and Anchor types UHS-I, UHS-I A4

Annex A 2

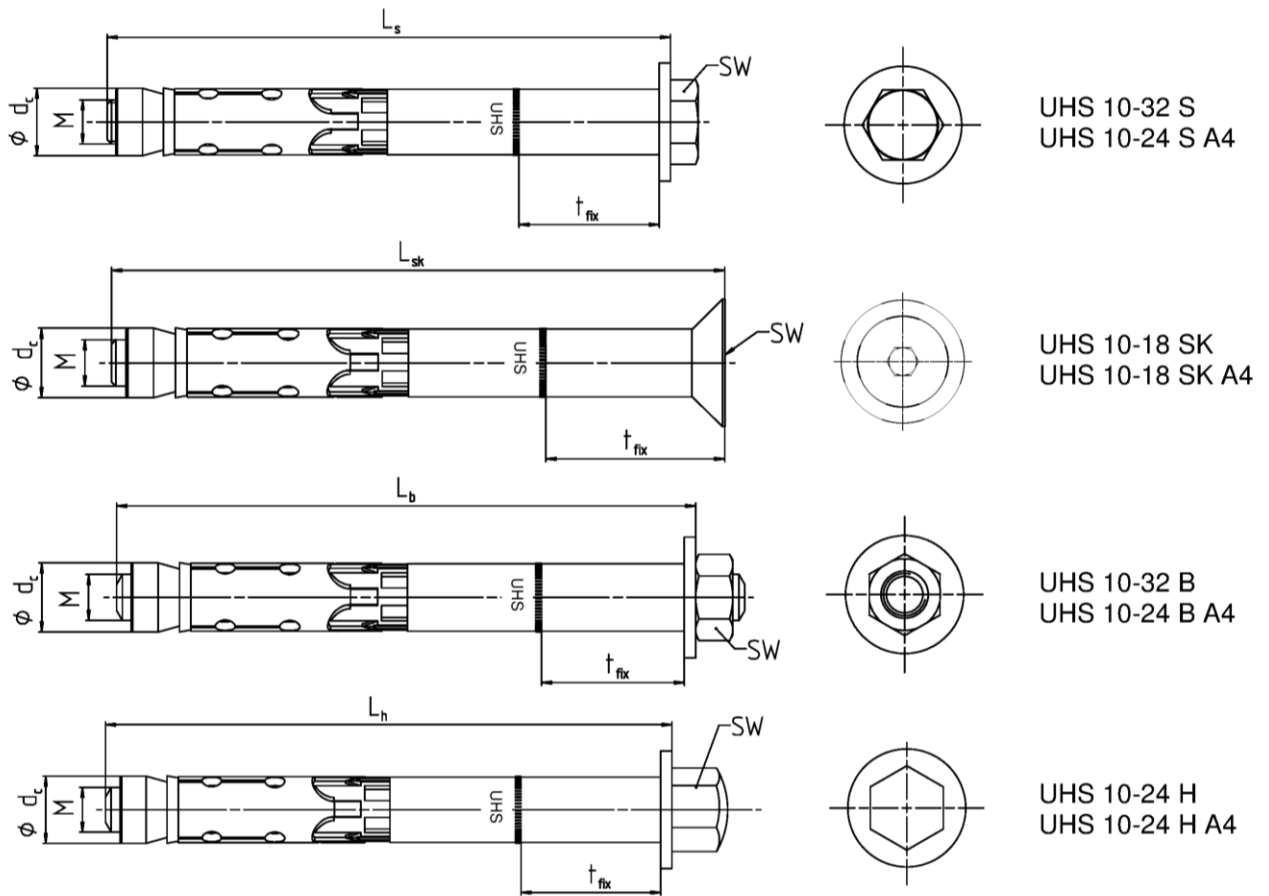


Table A1: Anchor Dimensions [mm] UHS and UHS A4

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|--|---|--------|--------|--------|--------|--------|--------|--------|
| Thread | M | = | 6 | 8 | 10 | 12 | 16 | 20 | 24 |
| Diameter conical nut | d _c | = | 10 | 12 | 14,8 | 17,8 | 23,7 | 27,5 | 31,5 |
| Wrench size SW UHS | UHS S, B | = | 10 | 13 | 17 | 19 | 24 | 30 | 36 |
| | UHS SK ¹⁾ | | 4 | 5 | 6 | 8 | - | - | - |
| | UHS H | | 13 | 17 | 17 | 19 | 24 | - | - |
| Wrench size SW UHS A4 | UHS S, B, H A4 | = | 10 | 13 | 17 | 19 | 24 | - | - |
| | UHS SK A4 ¹⁾ | | 4 | 5 | 6 | 8 | - | - | - |
| t _{fix} UHS + UHS A4 S, B, H | min | ≥ | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| t _{fix, red} UHS SK + UHS SK A4 ²⁾ | min | ≥ | 5 | 6 | 6 | 8 | - | - | - |
| t _{fix} UHS + UHS A4 | max | ≤ | 250 | 250 | 300 | 350 | 400 | 500 | 500 |
| Length of screw / bolt | L _s , L _h , L _b (- t _{fix}) | ≥ | 49 | 74 | 89 | 99 | 124 | 149 | 174 |
| Length of countersunk screw | L _{sk} (- t _{fix}) | ≥ | 54 | 79 | 95 | 107 | - | - | - |

¹⁾ Internal hexagon

²⁾ The influence of the thickness of fixture to the characteristic resistance for shear loads, steel failure without lever arm is taken into account, see tables C3 and C4

Upat Sleeve Anchor UHS, UHS-I

Product description
Anchor types and dimensions UHS, UHS A4

Annex A 3

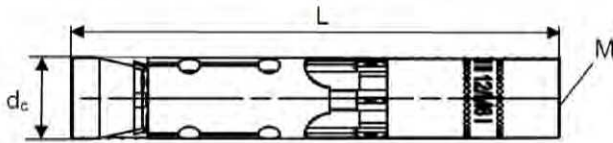


Table A2: Anchor Dimensions [mm] UHS-I and UHS-I A4

| Anchor type UHS-I and UHS-I A4 | | | UHS 12/M6 I | UHS 12/M8 I | UHS 15/M10 I | UHS 15/M12 I |
|--------------------------------|-------|---|-------------|-------------|--------------|--------------|
| Thread | M | = | 6 | 8 | 10 | 12 |
| Diameter conical nut | d_c | = | 12 | 12 | 14,8 | 14,8 |
| Wrench size internal hexagon | | = | 6 | 8 | 6 | 8 |
| Anchor length | L | = | 77,5 | 77,5 | 90 | 90 |

Table A3: Material UHS and UHS A4

| Nb. | Designation | UHS | UHS A4 |
|-----|-------------------|---|--|
| 1 | Hexagon screw | Steel class 8.8; EN ISO 898-1:2013 ¹⁾ | Strength class ≥ 70 EN ISO 3506:2010 |
| 2 | Countersunk screw | Steel class 8.8; EN ISO 898-1:2013 ¹⁾ | |
| 3 | Cap nut | Steel class 8 ¹⁾ | |
| 4 | Hexagon nut | Steel class 8 ¹⁾ | |
| 5 | Threaded rod | Steel $f_{uk} \geq 800$ N/mm ² ; $f_{yk} \geq 640$ N/mm ² ¹⁾ | |
| 6 | Cone nut | Steel EN 10277:2008 ¹⁾ | |
| 7 | Distance sleeve | Steel EN 10305:2016 ¹⁾ | EN 10088:2014 |
| 8 | Expansion sleeve | Steel EN 10139:2016/ EN 10277:2008 ¹⁾ | EN 10088:2014 |
| 9 | Plastic sleeve | ABS (plastic) | |
| 10 | Washer | Steel EN 10139:2016 ¹⁾ | EN 10088:2014 |
| 11 | Conical washer | Steel EN 10277:2008 ¹⁾ | EN 10088:2014 |

¹⁾ Galvanised according to EN ISO 4042:2001, $\geq 5 \mu\text{m}$

Table A4: Material UHS-I and UHS-I A4

| Nb. | Designation | UHS | UHS A4 |
|-----|----------------------------------|---|--|
| 6 | Cone nut | Steel EN 10277:2008 ¹⁾ | Strength class ≥ 70 EN ISO 3506:2010 |
| 8 | Expansion sleeve | Steel EN 10139:2016 / EN 10277:2008 ¹⁾ | EN 10088:2014 |
| 9 | Plastic sleeve | ABS (plastic) | |
| 12 | Internal thread bolt | Steel EN 10277:2008 ¹⁾ $f_{uk} \geq 750$ N/mm ² , $f_{yk} \geq 600$ N/mm ² | EN 10088:2014 $f_{uk} \geq 750$ N/mm ² , $f_{yk} \geq 600$ N/mm ² |
| | Requirements for fixing elements | Steel strength class 5.8, 6.8 or 8.8 EN ISO 898-1:2013 ¹⁾ | Steel strength class 50, 70 or 80 EN ISO 3506:2010 1.4362, 1.4401, 1.4404, 1.4571, 1.4529 |

¹⁾ Galvanised according to EN ISO 4042:2001, $\geq 5 \mu\text{m}$

Upat Sleeve Anchor UHS, UHS-I

Product description
Anchor types and dimensions UHS-I, UHS I-A4
Materials

Annex A 4

Specifications of intended use

Anchorage subject to:

| | | | | | | | |
|--|----|----------------|----------------|----------------|---------|------|------|
| Upat Sleeve Anchor UHS, UHS A4 | 10 | 12 | 15 | 18 | 24 | 28 | 32 |
| Upat Sleeve Anchor UHS-I, UHS-I A4 | - | 12 | 15 | | | | |
| Standard anchorage depth | | | | ✓ | | | |
| Static and quasi-static action load | | | | ✓ | | | |
| Cracked and uncracked concrete | | | | ✓ | | | |
| Fire exposure | | | | ✓ | | | |
| Seismic action for Performance Category C1 | - | S, B, H, SK | S, B, H, SK | S, B, H, SK | S, B, H | S, B | S, B |

Base materials:

- Reinforced and unreinforced normal weight concrete (cracked and uncracked) according to EN 206-1:2000
- Strength classes C20/25 to C50/60 according to EN 206-1:2000

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (UHS, UHS A4, UHS-I, UHS-I A4)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (UHS A4, UHS-I A4)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to FprEN 1992-4: 2016 and EOTA Technical Report TR 055

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Hammer or hollow drilling according to Annex B5 and B6
- Drill hole create perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement

Upat Sleeve Anchor UHS, UHS-I

Intended use
Specifications

Annex B 1

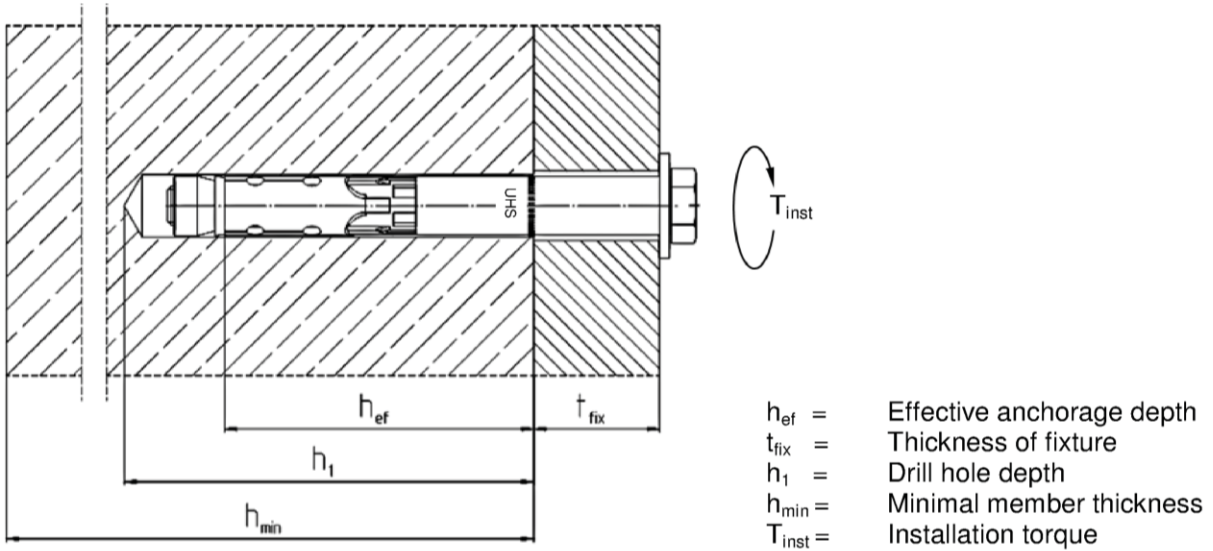


Table B1: Installation parameters UHS and UHS A4

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 | |
|---|----------------|-----------|-----------|-----------|-----------|-----------|-----------|-----|
| Nominal drill hole Diameter $d_0 =$ | 10 | 12 | 15 | 18 | 24 | 28 | 32 | |
| Maximum diameter of drill bit $d_{cut} \leq$ | 10,45 | 12,50 | 15,50 | 18,50 | 24,55 | 28,55 | 32,70 | |
| Depth of drill hole $h_1 \geq$ [mm] | 55 | 80 | 90 | 105 | 125 | 155 | 180 | |
| Diameter of clearance hole $d_f \leq$ | 12 | 14 | 17 | 20 | 26 | 31 | 35 | |
| Diameter of counter sunk UHS SK | 18 | 22 | 25 | 32 | - | - | - | |
| Depth of counter sunk, 90° UHS SK A4 | 5,0 | 5,8 | 5,8 | 8,0 | - | - | - | |
| Required installation torque $T_{inst} =$ [Nm] | UHS S | 10 | 22,5 | 40 | 80 | 160 | 180 | 200 |
| | UHS B | 10 | 17,5 | 38 | 80 | 120 | 180 | 200 |
| | UHS H | 10 | 22,5 | 40 | 80 | 90 | - | - |
| | UHS SK | 10 | 22,5 | 40 | 80 | - | - | - |
| | UHS S, B, H A4 | 15 | 25 | 40 | 100 | 160 | - | - |
| | UHS SK A4 | 10 | 25 | 40 | 100 | - | - | - |

Upat Sleeve Anchor UHS, UHS-I

Intended Use
Installation instructions UHS, UHS A4

Annex B 2

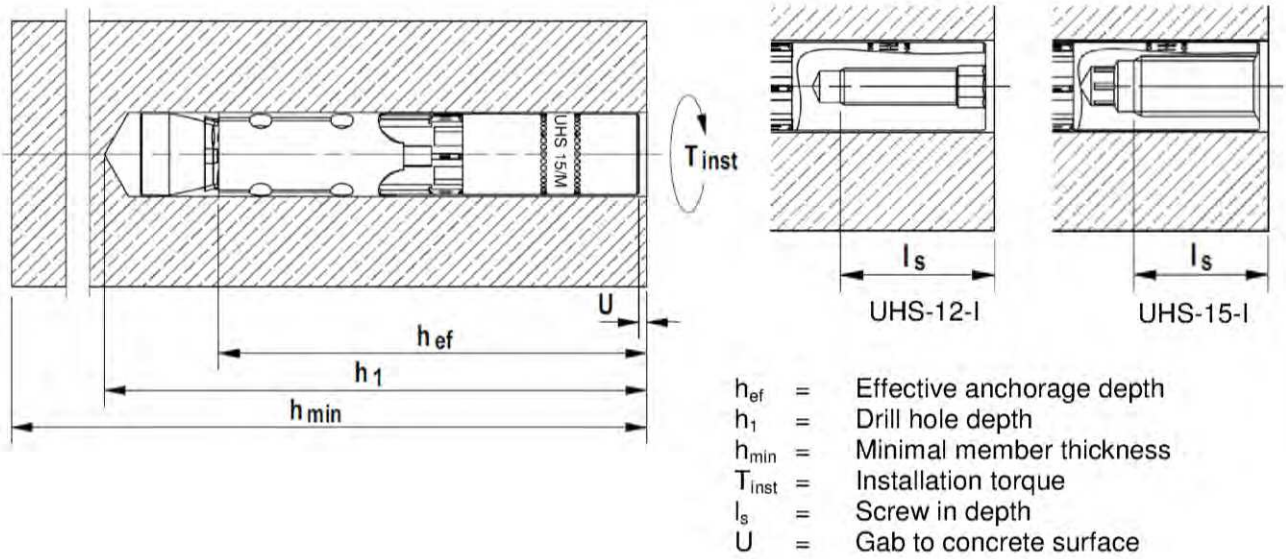


Table B2: Installation parameters UHS-I and UHS-I A4

| Anchor type UHS-I and UHS-I A4 | UHS 12/M6 I | UHS 12/M8 I | UHS 15/M10 I | UHS 15/M12 I |
|--|-------------|-------------|--------------|--------------|
| Nominal drill hole diameter $d_0 =$ [mm] | 12 | | 15 | |
| Maximum diameter of drill bit $d_{cut} \leq$ [mm] | 12,50 | | 15,50 | |
| Depth of drill hole $h_1 \geq$ [mm] | 85 | | 95 | |
| Diameter of clearance hole $d_f \leq$ [mm] | 7 | 9 | 12 | 14 |
| Required gap after torquing ¹⁾ $U =$ [mm] | 3-5 mm | | | |
| Required installation torque ¹⁾ $T_{inst} =$ [Nm] | 15 | | 25 | |
| Minimum screw in length $l_s \geq$ [mm] | 11+U | 13+U | 10+U | 12+U |
| Maximum screw in length $l_s \leq$ [mm] | 20+U | | | |
| Maximum torque on fixture in combination with screws and threaded rods strength class ≥ 5.8 and ≥ 50 $T_{max} \leq$ [Nm] | 3 | 8 | 15 | 20 |

¹⁾ Only one of both requirements has to be fulfilled

Upat Sleeve Anchor UHS, UHS-I

Intended Use
Installation instructions UHS-I, UHS-I A4

Annex B 3

Table B3: Minimum thickness of concrete member, minimum spacing and minimum edge distances UHS, UHS A4

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|-------------------|--------|--------|--------|--------|--------|--------|--------|
| Min. member thickness | h_{min} [mm] | 80 | 120 | 140 | 160 | 200 | 250 | 300 |
| Minimum spacing, cracked concrete | s_{min} [mm] | 50 | 60 | 70 | 80 | 100 | 125 | 150 |
| | for $c \geq$ [mm] | 50 | 80 | 120 | 140 | 180 | 200 | 260 |
| Minimum edge distance, cracked concrete | c_{min} [mm] | 50 | 60 | 70 | 80 | 100 | 150 | 150 |
| | for $s \geq$ [mm] | 50 | 80 | 120 | 160 | 200 | 220 | 280 |
| Minimum spacing, uncracked concrete | s_{min} [mm] | 50 | 70 | 80 | 90 | 125 | 150 | 175 |
| | for $c \geq$ [mm] | 70 | 100 | 100 | 160 | 200 | 220 | 360 |
| Minimum edge distance, uncracked concrete | c_{min} [mm] | 50 | 70 | 80 | 90 | 125 | 150 | 200 |
| | for $s \geq$ [mm] | 70 | 100 | 140 | 200 | 220 | 240 | 380 |

Intermediate values may be calculated by linear interpolation.

Table B4: Minimum thickness of concrete member, min. spacing and min. edge distances UHS-I, UHS-I A4

| Anchor type UHS-I and UHS-I A4 | | UHS 12/M6 I UHS 12/M8 I | UHS 15/M10 I UHS 15/M12 I |
|---|-------------------|----------------------------|------------------------------|
| Min. member thickness | h_{min} [mm] | 125 | 150 |
| Minimum spacing, cracked concrete | s_{min} [mm] | 60 | 70 |
| | for $c \geq$ [mm] | 80 | 120 |
| Minimum edge distance, cracked concrete | c_{min} [mm] | 60 | 70 |
| | for $s \geq$ [mm] | 80 | 120 |
| Minimum spacing, uncracked concrete | s_{min} [mm] | 70 | 80 |
| | for $c \geq$ [mm] | 100 | 100 |
| Minimum edge distance, uncracked concrete | c_{min} [mm] | 70 | 80 |
| | for $s \geq$ [mm] | 100 | 140 |

Intermediate values may be calculated by linear interpolation.

Table B5: Minimum spacing and minimum edge distances of anchors under fire exposure

| Anchor type | UHS 10 | UHS 12 UHS 12-I | UHS 15 UHS 15-I | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|---|--|--------------------|--------------------|--------|--------|--------|--------|
| Spacing $\frac{s_{cr,N}}{s_{min}}$ [mm] | $4 \times h_{ef}$ | | | | | | |
| | 50 | 60 | 70 | 80 | 100 | 125 | 150 |
| Edge distance $\frac{c_{cr,n}}{c_{min}}$ [mm] | $2 \times h_{ef}$ | | | | | | |
| | $c_{min} = 2 \times h_{ef}$, for fire exposure from more than one side $c_{min} \geq 300$ mm | | | | | | |

Upat Sleeve Anchor UHS, UHS-I

Intended Use



Minimum thickness of member, minimum spacings and edge distances
Minimum spacing and minimum edge distances of anchors under fire exposure

Annex B 4

Installation instruction for the Upat Sleeve Anchor
UHS 10 - UHS 32 and UHS 10 A4 - UHS 24 A4

| | | | | | | |
|------------------------|--|---|---|---|---|---|
| Hollow drilling |  | | | | | Continue with step 3, 4 and 5 |
| |  | | | | | Installation instruction UHS 10 - 32 S and UHS 10-24 S A4 |
| Hammer drilling |  | | | | | Installation instruction UHS 10 - 18 SK and UHS 10-18 SK A4 |
| |  | | | | | Installation instruction UHS 10 - 32 B and UHS 10-24 B A4 |
| |  | | | | | Installation instruction UHS 10 - 24 H and UHS 10-24 H A4 |
| | Step | 1 | 2 | 3 | 4 | 5 |

| Step | Description | |
|------|--|--|
| 1 | Create drill hole with hammer drill | Create drill hole with hollow drill and vacuum cleaner |
| 2 | Clean bore hole | - |
| 3 | Set anchor | |
| 4 | Expand anchor with prescribed installation torque T_{inst} | |
| 5 | Finished installation | |


| Types of drills | |
|-----------------|---|
| Hammer drill |  |
| Hollow drill |  |

Upat Sleeve Anchor UHS, UHS-I

Intended Use
 Installation instructions UHS, UHS A4

Annex B 5

Installation instruction for the Upat Sleeve Anchor internal thread
UHS-I and UHS-I A4

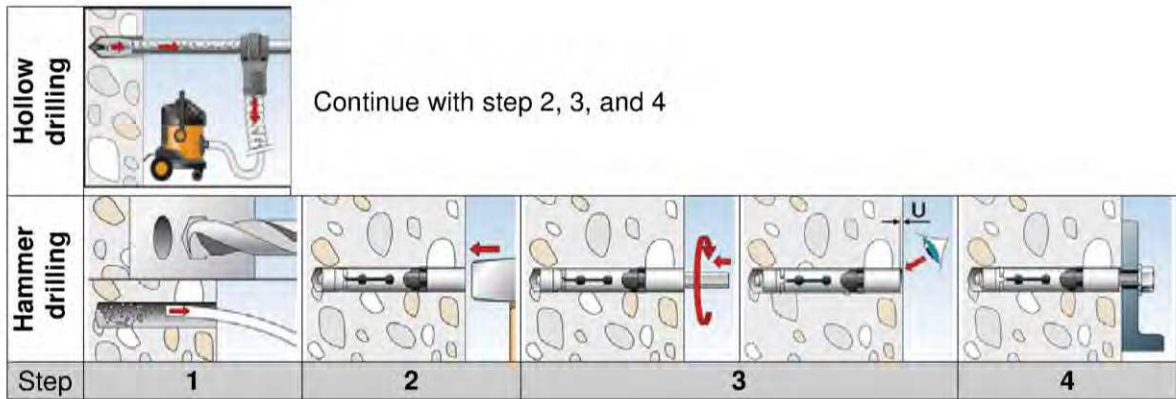

| Step | Description | | |
|---|--|---|--|
| 1 | <table border="1"> <tr> <td>Create drill hole with hammer drill Clean drill hole</td> <td>Create drill hole with hollow drill and vacuum cleaner</td> </tr> </table> | Create drill hole with hammer drill Clean drill hole | Create drill hole with hollow drill and vacuum cleaner |
| Create drill hole with hammer drill Clean drill hole | Create drill hole with hollow drill and vacuum cleaner | | |
| 2 | Hammering in the anchor flushed with the surface of the concrete | | |
| 3 | Tightening the anchor. Tightening with the included hexagon in the package is preferred. Other tightening methods are allowed. Tighten the anchor into the concrete until the gap U is 3-5 mm or the installation torque is reached. Only one requirement has to be fulfilled. | | |
| 4 | Connecting the fixing and the anchor with a fitting fastener. The length of the fastener should be determined depending on the thickness of fixture t_{fix} , admissible tolerances, and available thread length $l_{s,max}$ and $l_{s,min}$ including the gap U. Tightening the screw with the torque $\leq T_{max}$. | | |

| Types of drills | |
|-----------------|--|
| Hammer drill | |
| Hollow drill | |

Upat Sleeve Anchor UHS, UHS-I

Intended Use
 Installation instructions UHS-I, UHS I A4

Annex B 6

Table C1: Characteristic values of **tension** resistance under static and quasi-static action for UHS and UHS A4

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|--------------------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Steel failure | | | | | | | | | |
| UHS | $N_{Rk,s}$ | [kN] | 16,1 | 29,3 | 46,4 | 67,4 | 125,3 | 195,8 | 282,0 |
| UHS A4 | $N_{Rk,s}$ | [kN] | 14,1 | 25,6 | 40,6 | 59,0 | 109,7 | - | - |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ | [-] | 1,5 | | | | | | |
| Pullout failure | | | | | | | | | |
| cracked concrete UHS and UHS A4 | $N_{Rk,p}$ | [kN] C20/25 | 6 | 11 | 16 | 25 | 2) | | |
| uncracked concrete UHS | $N_{Rk,p}$ | [kN] C20/25 | 2) | | | | | | |
| uncracked concrete UHS A4 | $N_{Rk,p}$ | [kN] C20/25 | 2) | 18 | 2) | | | - | |
| Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete | ψ_c | C25/30 | 1,12 | | | | | | |
| | | C30/37 | 1,23 | | | | | | |
| | | C35/45 | 1,32 | | | | | | |
| | | C40/50 | 1,41 | | | | | | |
| | | C45/55 | 1,50 | | | | | | |
| | | C50/60 | 1,58 | | | | | | |
| Installation factor | γ_{inst} | [-] | 1,0 | | | | | | |
| Concrete cone failure and splitting failure | | | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 40 | 60 | 70 | 80 | 100 | 125 | 150 |
| Factor k_1 for uncracked concrete | $k_{uc,N}$ | [-] | 11,0 | | | | | | |
| Factor k_1 for cracked concrete | $k_{cr,N}$ | [-] | 7,7 | | | | | | |
| Spacing | $s_{cr,N}$ | [mm] | 120 | 180 | 210 | 240 | 300 | 375 | 450 |
| Edge distance | $c_{cr,N}$ | | 60 | 90 | 105 | 120 | 150 | 187,5 | 225 |
| Spacing (splitting) | $s_{cr,sp}$ | | 190 | 300 | 320 | 340 | 380 | 480 | 570 |
| Edge distance (splitting) | $c_{cr,sp}$ | | 95 | 150 | 160 | 170 | 190 | 240 | 285 |
| Installation factor | γ_{inst} | | [-] | 1,0 | | | | | |

¹⁾ In absence of other national regulations

²⁾ Pullout failure not relevant

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values of resistance under tension loads for UHS and UHS A4

Annex C 1

Table C2: Characteristic values of **tension** resistance under static and quasi-static action for UHS-I and UHS-I A4

| Anchor type UHS-I and UHS-I A4 | | | | UHS 12/M6 I | UHS 12/M8 I | UHS 15/M10 I | UHS 15/M12 I |
|--|--------------------|------|--------|----------------|----------------|-----------------|-----------------|
| Steel failure | | | | | | | |
| Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898 | | | | | | | |
| Strength class 5.8 | $N_{Rk,s}$ | | | 10 | 19 | 29 | 43 |
| Strength class 6.8 | $N_{Rk,s}$ | [kN] | | 12 | 23 | 35 | 44 |
| Strength class 8.8 | $N_{Rk,s}$ | | | 16 | 27 | 44 | 44 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ | [-] | | 1,5 | | | |
| Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506 | | | | | | | |
| Screw/thread strength class 50 | $N_{Rk,s}$ | [kN] | | 10 | 19 | 29 | 43 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ | [-] | | 2,86 | | | |
| Screw/thread strength class 70 | $N_{Rk,s}$ | [kN] | | 14 | 26 | 41 | 54 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ | [-] | | 1,87 | | | |
| Screw/thread strength class 80 | $N_{Rk,s}$ | [kN] | | 16 | 29 | 46 | 46 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ | [-] | | 1,60 | | | |
| Pullout failure | | | | | | | |
| cracked concrete | $N_{Rk,p}$ | [kN] | C20/25 | 9 | | 12 | |
| uncracked concrete | $N_{Rk,p}$ | [kN] | C20/25 | 18 | | 2) | |
| Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete | ψ_c | | C25/30 | 1,12 | | | |
| | | | C30/37 | 1,23 | | | |
| | | | C35/45 | 1,32 | | | |
| | | | C40/50 | 1,41 | | | |
| | | | C45/55 | 1,50 | | | |
| | | | C50/60 | 1,58 | | | |
| Installation factor | γ_{inst} | [-] | | 1,0 | | | |
| Concrete cone failure and splitting failure | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | | 60 | | 70 | |
| Factor k_1 for uncracked concrete | $k_{ucr,N}$ | [-] | | 11,0 | | | |
| Factor k_1 for cracked concrete | $k_{cr,N}$ | | | 7,7 | | | |
| Spacing | $s_{cr,N}$ | | | 180 | | 210 | |
| Edge distance | $c_{cr,N}$ | | | 90 | | 105 | |
| Spacing (splitting) | $s_{cr,sp}$ | | | 300 | | 320 | |
| Edge distance (splitting) | $c_{cr,sp}$ | | | 150 | | 160 | |
| Installation factor | γ_{inst} | [-] | | 1,0 | | | |

¹⁾ In absence of other national regulations

²⁾ Pullout failure is not decisive

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values of resistance under tension loads for UHS-I and UHS-I A4

Annex C 2

Table C3: Characteristic values of **shear** resistance for **UHS and UHS A4** under static and quasi-static action

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|---|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Steel failure without lever arm | | | | | | | | |
| UHS S | $V_{Rk,s}$ | 18 | 33 | 59 | 76 | 146 | 174 | 217 |
| UHS B + UHS H | $V_{Rk,s}$ | 16 | 27 | 41 | 62 | 119 | 146 | 169 |
| UHS S A4, UHS B A4, UHS H A4 | $V_{Rk,s}$ [kN] | 18 | 28 | 43 | 66 | 119 | - | - |
| UHS SK for t_{fix} standard | $V_{Rk,s}$ | 18 | 33 | 59 | 76 | - | - | - |
| UHS SK A4 for t_{fix} standard | $V_{Rk,s}$ | 18 | 28 | 43 | 66 | - | - | - |
| t_{fix} standard for UHS SK | t_{fix} [mm] | ≥10 | ≥10 | ≥15 | ≥15 | - | - | - |
| UHS SK for t_{fix} reduced | $V_{Rk,s}$ [kN] | 8 | 14 | 23 | 34 | - | - | - |
| UHS SK A4 for t_{fix} reduced | $V_{Rk,s}$ | 7 | 13 | 20 | 30 | - | - | - |
| t_{fix} reduced for UHS SK | t_{fix} [mm] | <10 | <10 | <15 | <15 | - | - | - |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,25 | | | | | | |
| Factor for ductility | k_7 | 1,0 | | | | | | |
| Steel failure with lever arm | | | | | | | | |
| Bending UHS | $M^0_{Rk,s}$ [Nm] | 12 | 30 | 60 | 105 | 266 | 518 | 896 |
| Bending UHS A4 | $M^0_{Rk,s}$ | 11 | 26 | 52 | 92 | 232 | - | - |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,25 | | | | | | |
| Concrete pryout failure | | | | | | | | |
| Factor for pry-out | k_8 [-] | 1,0 | 2,0 | | | | | |
| Concrete edge failure | | | | | | | | |
| Effective length of anchor | l_f [mm] | 40 | 60 | 70 | 80 | 100 | 125 | 150 |
| Effective diameter of anchor | d_{nom} | 10 | 12 | 15 | 18 | 24 | 28 | 32 |
| Installation factor | γ_{inst} [-] | 1,0 | | | | | | |

¹⁾ In absence of other national regulations

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values of resistance under **shear** loads for UHS and UHS A4

Annex C 3

Table C4: Characteristic values of **shear** resistance for **UHS-I** and **UHS-I A4** under static and quasi-static action

| Anchor type UHS-I and UHS-I A4 | | UHS 12/M6 I | UHS 12/M8 I | UHS 15/M10 I | UHS 15/M12 I |
|--|------------------------|----------------|----------------|-----------------|-----------------|
| Steel failure without lever arm | | | | | |
| Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898 | | | | | |
| Strength class 5.8 | $V_{Rk,s}$ | 5 | 9 | 15 | 21 |
| Strength class 6.8 | $V_{Rk,s}$ [kN] | 6 | 11 | 18 | 24 |
| Strength class 8.8 | $V_{Rk,s}$ | 8 | 14 | 23 | 24 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,25 | | | |
| Factor for ductility | k_7 | 1,0 | | | |
| Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506 | | | | | |
| Strength class 50 | $V_{Rk,s}$ [kN] | 5 | 9 | 15 | 21 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 2,38 | | | |
| Strength class 70 | $V_{Rk,s}$ [kN] | 7 | 13 | 20 | 30 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,56 | | | |
| Strength class 80 | $V_{Rk,s}$ [kN] | 8 | 15 | 23 | 32 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,33 | | | |
| Factor for ductility | k_7 | 1,0 | | | |
| Steel failure with lever arm | | | | | |
| Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898 | | | | | |
| Strength class 5.8 | $M^0_{Rk,s}$ | 8 | 19 | 37 | 65 |
| Strength class 6.8 | $M^0_{Rk,s}$ [Nm] | 9 | 23 | 44 | 78 |
| Strength class 8.8 | $M^0_{Rk,s}$ | 12 | 30 | 60 | 105 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,25 | | | |
| Factor for ductility | k_7 | 1,0 | | | |
| Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506 | | | | | |
| Strength class 50 | $M^0_{Rk,s}$ [Nm] | 8 | 19 | 37 | 65 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 2,38 | | | |
| Strength class 70 | $M^0_{Rk,s}$ [Nm] | 11 | 26 | 52 | 92 |
| Partial sensitivity factor | | 1,56 | | | |
| Strength class 80 | $M^0_{Rk,s}$ [Nm] | 12 | 30 | 60 | 105 |
| Partial sensitivity factor | $\gamma_{Ms}^{1)}$ [-] | 1,33 | | | |
| Factor for ductility | k_7 | 1,0 | | | |
| Concrete pryout failure | | | | | |
| Factor for pry-out | k_8 [-] | 2,0 | | | |
| Concrete edge failure | | | | | |
| Effective length of anchor under | l_f [mm] | 60 | | 70 | |
| Effective diameter of anchor | d_{nom} | 12 | | 15 | |
| Installation factor | γ_{inst} [-] | 1,0 | | | |

¹⁾ In absence of other national regulations

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values of resistance under **shear** loads for UHS-I and UHS-I A4

Annex C 4

Table C5: Characteristic values of **tension** resistance under **fire exposure**

| Anchor type | R30 Fire resistance 30 minutes | | | R60 Fire resistance 60 minutes | | |
|--|-----------------------------------|--------------------------|----------------------------|-------------------------------------|---------------------------|-----------------------------|
| | $N_{Rk,s,fi,30}$ [kN] | $N_{Rk,p,fi,30}$ [kN] | $N_{Rk,c,fi,30}^0$ [kN] | $N_{Rk,s,fi,60}$ [kN] | $N_{Rk,p,fi,60}$ [kN] | $N_{Rk,c,fi,60}^0$ [kN] |
| UHS 10 (A4) | 0,2 | 1,8 | 1,8 | 0,2 | 1,8 | 1,8 |
| UHS 12 (A4) | 2,0 | 3,0 | 5,0 | 1,3 | 3,0 | 5,0 |
| UHS 15 (A4) | 3,2 | 4,0 | 7,4 | 2,3 | 4,0 | 7,4 |
| UHS 18 (A4) | 4,8 | 6,3 | 10,3 | 3,9 | 6,3 | 10,3 |
| UHS 24 (A4) | 8,9 | 9,0 | 18,0 | 7,3 | 9,0 | 18,0 |
| UHS 28 | 13,9 | 12,6 | 31,4 | 11,3 | 12,6 | 31,4 |
| UHS 32 | 20,0 | 16,5 | 49,6 | 16,3 | 16,5 | 49,6 |
| UHS 12/M6 I (A4) 5.8/50 ¹⁾ | 0,1 | 2,3 | 5,0 | 0,1 | 2,3 | 5,0 |
| 8.8, 70, 80 ^{1) 2)} | 0,2 | | | 0,2 | | |
| UHS 12/M8 I (A4) 5.8/50 ¹⁾ | 1,3 | | | 0,8 | | |
| 8.8, 70, 80 ^{1) 2)} | 2,0 | | 1,3 | | | |
| UHS 15/M10 I (A4) 5.8/50 ¹⁾ | 2,0 | 3,0 | 7,4 | 1,4 | 3,0 | 7,4 |
| 8.8, 70, 80 ^{1) 2)} | 3,2 | | | 2,3 | | |
| UHS 15/M12 I (A4) 5.8/50 ¹⁾ | 3,0 | | | 2,4 | | |
| 8.8, 70, 80 ^{1) 2)} | 4,8 | | 3,9 | | | |
| | R90 Fire resistance 90 minutes | | | R120 Fire resistance 120 minutes | | |
| | $N_{Rk,s,fi,90}$ [kN] | $N_{Rk,p,fi,90}$ [kN] | $N_{Rk,c,fi,90}^0$ [kN] | $N_{Rk,s,fi,120}$ [kN] | $N_{Rk,p,fi,120}$ [kN] | $N_{Rk,c,fi,120}^0$ [kN] |
| UHS 10 (A4) | 0,1 | 1,8 | 1,8 | 0,1 | 1,5 | 1,5 |
| UHS 12 (A4) | 0,6 | 3,0 | 5,0 | 0,2 | 2,4 | 4,0 |
| UHS 15 (A4) | 1,4 | 4,0 | 7,4 | 1,0 | 3,2 | 5,9 |
| UHS 18 (A4) | 3,0 | 6,3 | 10,3 | 2,6 | 5,0 | 8,2 |
| UHS 24 (A4) | 5,6 | 9,0 | 18,0 | 4,8 | 7,2 | 14,4 |
| UHS 28 | 8,8 | 12,6 | 31,4 | 7,5 | 10,1 | 25,2 |
| UHS 32 | 12,6 | 16,5 | 49,6 | 10,8 | 13,2 | 39,7 |
| UHS 12/M6 I (A4) 5.8/50 ¹⁾ | 0,1 | 2,3 | 5,0 | 0,1 | 1,8 | 4,0 |
| 8.8, 70, 80 ^{1) 2)} | 0,1 | | | 0,1 | | |
| UHS 12/M8 I (A4) 5.8/50 ¹⁾ | 0,4 | | | 0,1 | | |
| 8.8, 70, 80 ^{1) 2)} | 0,6 | | 0,2 | | | |
| UHS 15/M10 I (A4) 5.8/50 ¹⁾ | 0,9 | 3,0 | 7,4 | 0,6 | 2,4 | 5,9 |
| 8.8, 70, 80 ^{1) 2)} | 1,4 | | | 1,0 | | |
| UHS 15/M12 I (A4) 5.8/50 ¹⁾ | 1,9 | | | 1,6 | | |
| 8.8, 70, 80 ^{1) 2)} | 3,0 | | 2,6 | | | |

¹⁾ Intermediate values by linear interpolation

²⁾ In combination with screw / threaded rod strength class 8.8, 70, 80

In absence of other national regulations the partial sensitivity factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values of **tension** resistance under **fire exposure** in cracked and uncracked concrete

Annex C 5

Table C6: Characteristic values of **shear** resistance under **fire exposure**

| Anchor type | R30 Fire resistance 30 minutes | | R60 Fire resistance 60 minutes | |
|---------------------------|-----------------------------------|----------------------------|-------------------------------------|-----------------------------|
| | $V_{Rk,s,fi,30}$ [kN] | $M^0_{Rk,s,fi,30}$ [Nm] | $V_{Rk,s,fi,60}$ [kN] | $M^0_{Rk,s,fi,60}$ [Nm] |
| UHS 10 (A4) | 0,3 | 0 | 0,3 | 0 |
| UHS 12 (A4) | 2,0 | 2 | 1,3 | 1 |
| UHS 15 (A4) | 3,2 | 4 | 2,3 | 3 |
| UHS 18 (A4) | 4,8 | 7 | 3,9 | 6 |
| UHS 24 (A4) | 8,9 | 19 | 7,3 | 15 |
| UHS 28 | 13,9 | 37 | 11,3 | 30 |
| UHS 32 | 20,0 | 64 | 16,3 | 52 |
| UHS 12/M6 I (A4) 5.8/50 | 0,2 | 0 | 0,2 | 0 |
| 8.8, 70, 80 ¹⁾ | 0,3 | 0 | 0,3 | 0 |
| UHS 12/M8 I (A4) 5.8/50 | 1,3 | 1 | 0,8 | 1 |
| 8.8, 70, 80 ¹⁾ | 2,0 | 2 | 1,3 | 1 |
| UHS 15/M10 I (A4) 5.8/50 | 2,0 | 3 | 1,4 | 2 |
| 8.8, 70, 80 ¹⁾ | 3,2 | 4 | 2,3 | 3 |
| UHS 15/M12 I (A4) 5.8/50 | 3,0 | 4 | 2,4 | 4 |
| 8.8, 70, 80 ¹⁾ | 4,8 | 7 | 3,9 | 6 |
| | R90 Fire resistance 90 minutes | | R120 Fire resistance 120 minutes | |
| | $V_{Rk,s,fi,90}$ [kN] | $M^0_{Rk,s,fi,90}$ [Nm] | $V_{Rk,s,fi,120}$ [kN] | $M^0_{Rk,s,fi,120}$ [Nm] |
| UHS 10 (A4) | 0,2 | 0 | 0,1 | 0 |
| UHS 12 (A4) | 0,6 | 1 | 0,2 | 0 |
| UHS 15 (A4) | 1,4 | 2 | 1,0 | 1 |
| UHS 18 (A4) | 3,0 | 5 | 2,6 | 4 |
| UHS 24 (A4) | 5,6 | 12 | 4,8 | 10 |
| UHS 28 | 8,8 | 23 | 7,5 | 20 |
| UHS 32 | 12,6 | 40 | 10,8 | 34 |
| UHS 12/M6 I (A4) 5.8/50 | 0,1 | 0 | 0,1 | 0 |
| 8.8, 70, 80 ¹⁾ | 0,2 | 0 | 0,1 | 0 |
| UHS 12/M8 I (A4) 5.8/50 | 0,4 | 1 | 0,1 | 0 |
| 8.8, 70, 80 ¹⁾ | 0,6 | 1 | 0,2 | 0 |
| UHS 15/M10 I (A4) 5.8/50 | 0,9 | 2 | 0,6 | 1 |
| 8.8, 70, 80 ¹⁾ | 1,4 | 3 | 1,0 | 1 |
| UHS 15/M12 I (A4) 5.8/50 | 1,9 | 4 | 1,6 | 3 |
| 8.8, 70, 80 ¹⁾ | 3,0 | 6 | 2,6 | 4 |

¹⁾ In combination with screw / threaded rod strength class 8.8, 70, 80

In absence of other national regulations the partial sensitivity factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

Upat Sleeve Anchor UHS, UHS-I

Performances
Characteristic values of shear resistance under **fire exposure**

Annex C 6

Table C7: Characteristic values for seismic action valid for performance category C1 for UHS

| | | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Steel failure | | | | | | | |
| Anchor type UHS S, SK, B, H | $N^0_{Rk,s,eq}$ [kN] | 29,3 | 46,4 | 67,4 | 125,3 | 195,8 | 282,0 |
| Anchor type UHS S, SK, B, H | $\gamma_{Ms}^{1)}$ [-] | 1,5 | | | | | |
| Pullout failure | | | | | | | |
| Anchor type UHS S, SK, B, H | $N^0_{Rk,p,eq}$ [kN] | 12,0 | 16,0 | 25,0 | 36,0 | 50,3 | 66,1 |
| Anchor type UHS S, SK, B, H | $\gamma_{Mp}^{1)}$ [-] | 1,5 | | | | | |
| Steel failure without lever arm | | | | | | | |
| Anchor type UHS S, SK | $V^0_{Rk,s,eq}$ [kN] | 25 | 41 | 60 | 123 | 141 | 200 |
| Anchor type UHS B, H | $V^0_{Rk,s,eq}$ [kN] | 17 | 30 | 46 | 103 | 117 | 169 |
| Anchor type UHS S, SK, B, H | $\gamma_{Ms}^{1)}$ [-] | 1,25 | | | | | |

¹⁾ In absence of other national regulations

Table C8: Displacements due to tension loads for UHS and UHS A4

| Anchor type UHS S, SK, B, H and UHS S, SK, B, H A4 | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|---|-------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Tension load cracked concrete | N [kN] | 3,6 | 5,7 | 7,6 | 11,9 | 17,1 | 24,0 | 31,5 |
| Corresponding displacements | δ_{N0} [mm] | 1,0 | 1,0 | 1,0 | 1,0 | 1,0 | 0,7 | 0,7 |
| | $\delta_{N\infty}$ [mm] | 1,7 | 1,6 | 1,6 | 1,6 | 1,8 | 1,3 | 1,1 |
| Tension load uncracked concrete | N [kN] | 6,0 | 11,2 | 14,1 | 17,2 | 24,0 | 33,6 | 44,2 |
| Corresponding displacements | δ_{N0} [mm] | 0,6 | 1,0 | 1,0 | 1,0 | 1,0 | 0,3 | 0,3 |
| | $\delta_{N\infty}$ [mm] | 1,7 | 1,6 | 1,6 | 1,6 | 1,8 | 1,3 | 1,1 |

Table C9: Displacements due to tension loads for UHS-I and UHS-I A4

| Anchor type UHS-I and UHS-I A4 | | UHS 12/M6 I UHS 12/M8 I | UHS 15/M10 I UHS 15/M12 I |
|---------------------------------|-------------------------|----------------------------|------------------------------|
| Tension load cracked concrete | N [kN] | 4,3 | 5,7 |
| Tension load uncracked concrete | | 9,5 | 14,1 |
| Corresponding displacements | δ_{N0} [mm] | 1,7 | 1,9 |
| | $\delta_{N\infty}$ [mm] | 2,2 | 2,9 |

Upat Sleeve Anchor UHS, UHS-I

Performances

Characteristic values for seismic action valid for performance category C1
Displacements under tension loads

Annex C 7

Table C10: Displacements due to shear loads for UHS S and SK ¹⁾

| Anchor type UHS S and UHS SK | | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|--------------------|------|--------|--------|--------|--------|--------|--------|--------|
| Shear load in cracked and uncracked concrete | V | [kN] | 10,3 | 18,9 | 33,7 | 43,4 | 83,4 | 99,4 | 124,0 |
| Corresponding displacements | δ_{V0} | [mm] | 2,4 | 2,7 | 4,4 | 5,0 | 7,0 | 6,0 | 8,0 |
| | $\delta_{V\infty}$ | [mm] | 3,6 | 4,1 | 6,6 | 7,5 | 10,5 | 9,0 | 12,0 |

¹⁾ Tolerance of clearance hole not included in the displacements

Table C11: Displacements due to shear loads for UHS B and H ¹⁾

| Anchor type: UHS B and UHS H | | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 | UHS 28 | UHS 32 |
|--|--------------------|------|--------|--------|--------|--------|--------|--------|--------|
| Shear load in cracked and uncracked concrete | V | [kN] | 8,9 | 15,4 | 23,4 | 35,4 | 68,0 | 83,4 | 96,6 |
| Corresponding displacements | δ_{V0} | [mm] | 2,2 | 2,3 | 3,0 | 5,0 | 7,0 | 5,0 | 5,0 |
| | $\delta_{V\infty}$ | [mm] | 3,3 | 3,5 | 4,5 | 7,5 | 10,5 | 7,5 | 7,5 |

¹⁾ Tolerance of clearance hole not included in the displacements

Table C12: Displacements due to shear loads for UHS S A4, UHS SK A4, UHS B A4 and UHS H A4 ¹⁾

| Anchor type: UHS S A4, UHS SK A4, UHS B A4, UHS H A4 | | | UHS 10 | UHS 12 | UHS 15 | UHS 18 | UHS 24 |
|--|--------------------|------|--------|--------|--------|--------|--------|
| Shear load in cracked and uncracked concrete | V | [kN] | 10,3 | 16,0 | 24,6 | 37,7 | 68,0 |
| Corresponding displacements | δ_{V0} | [mm] | 3,5 | 3,5 | 3,7 | 5,7 | 9,0 |
| | $\delta_{V\infty}$ | [mm] | 5,3 | 5,3 | 5,6 | 8,6 | 13,5 |

¹⁾ Tolerance of clearance hole not included in the displacements

Table C13: Displacements due to shear loads for UHS-I and UHS-I A4 ¹⁾

| Anchor type UHS-I and UHS-I A4 | | | UHS 12/M6 I | UHS 12/M8 I | UHS 15/M10 I | UHS 15/M12 I |
|--|--------------------|------|-------------|-------------|--------------|--------------|
| Shear load in cracked and uncracked concrete | V | [kN] | 4,6 | 8,3 | 13,3 | 13,7 |
| Corresponding displacements | δ_{V0} | [mm] | 2,6 | 2,6 | 2,2 | 2,2 |
| | $\delta_{V\infty}$ | [mm] | 3,9 | 3,9 | 3,3 | 3,3 |

¹⁾ Tolerance of clearance hole not included in the displacements

Upat Sleeve Anchor UHS, UHS-I

Performances
Displacements under shear loads

Annex C 8